

EzyFloor® Material Options

	Plywood Type	Typical Weight Of A 6000mm x 2200mm Floor (kg)	Thickness (Nominal) (mm)	Water Resistant Coating On Underside	Untrimmed	Trimmed To Width	Fully Detailed Including Wheel Arches	Plywood Structurally Rated	EzyFloor® Australian Made
EzyFloor® Eco P	Radiata Pine	92	12	O	S	O	O	-	✓
EzyFloor® Eco Film	Hardwood	96	12	F	S	O	O	-	✓
EzyFloor® Eco H	Hardwood	79	12	S	S	O	O	-	✓
EzyFloor® Lite	Hardwood	67	12	O	S	O	O	-	✓
EzyFloor® Premium*	Radiata Pine	92	12	O	S	O	O	✓	✓

*The Premium floor utilises structurally rated plywood providing better strength and stability as the plywood is certified to AS/NZS 2269 and quality assured to the JAS-ANZ certification program. O = Optional S = Standard F = Film (Standard)


EzyFloor® Features

- Flat joints
- Material of the same construction
- Scarf joint effected through the full thickness of the floor panel
- Corresponding alignment of plies
- Same grain direction of corresponding plies

Scarf Joint Bond Quality

- The bending strength of EzyFloor® joints has been independently laboratory tested to AS/NZS2098.3 "Bond Quality and Strength of Scarf Joints in Plywood". EzyFloor® joints achieved a 100% pass rate in this test.

EzyFloor Trimming Options

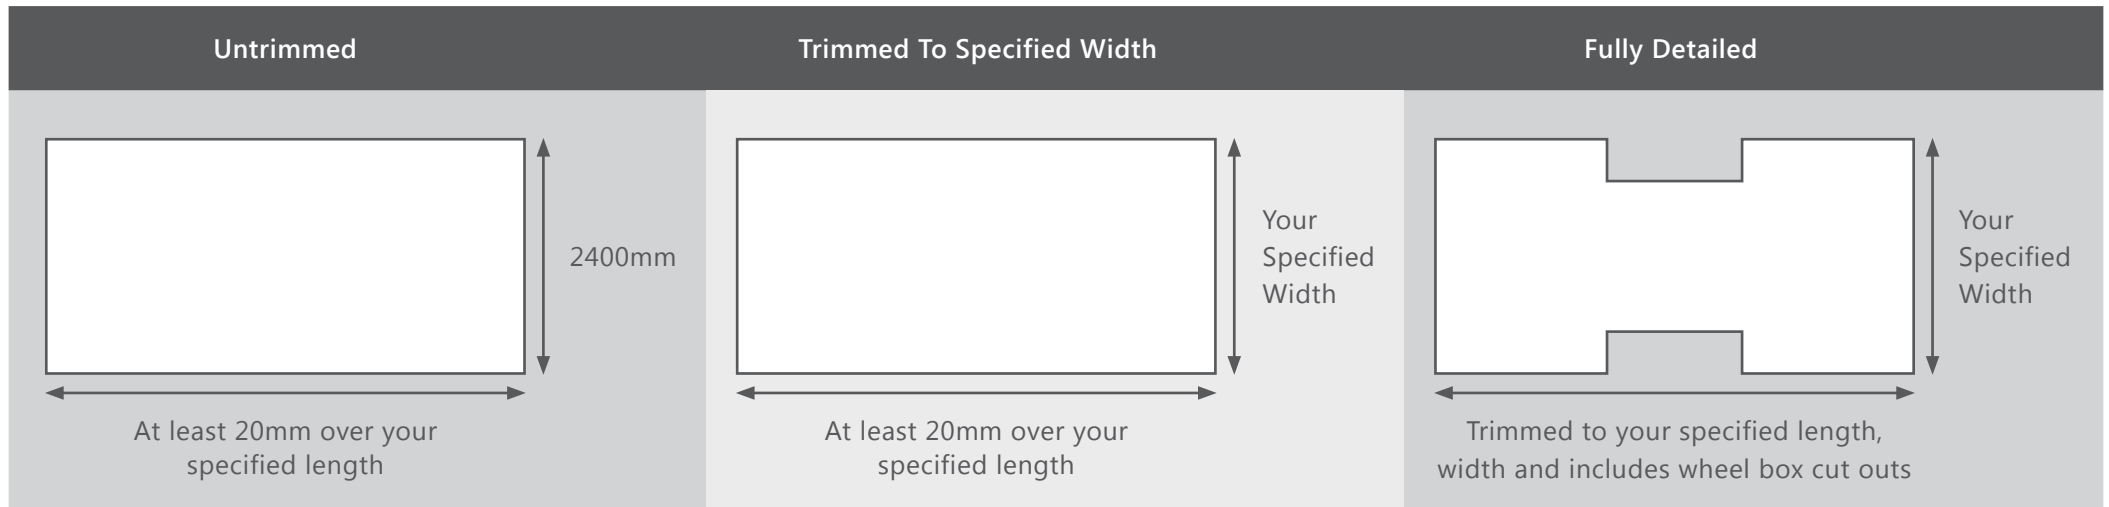

Additional Options

The EzyFloor can be provided with the following finishing options:

- Unpainted
- Painted with a water resistant coating on the underside (Opalcote)

You should always ensure that floors comply with your fixing requirements